

FINAL YORK RUN WATERSHED TMDL

Fayette County

For Acid Mine Drainage Affected Segments



Prepared by:

Pennsylvania Department of Environmental Protection

April 3, 2008

TABLE OF CONTENTS

Introduction.....	4
Directions to the York Run Watershed.....	5
Hydrology and Geology.....	5
Segments addressed in this TMDL.....	6
Clean Water Act Requirements	7
Section 303(d) Listing Process	8
Basic Steps for Determining a TMDL.....	9
Watershed History	9
AMD Methodology.....	9
TMDL Endpoints.....	11
TMDL Elements (WLA, LA, MOS)	12
Allocation Summary	12
Recommendations.....	16
Public Participation.....	19
Future TMDL Modifications	19
Changes in TMDLs Requiring EPA Approval	19
Changes in TMDLs Not Requiring EPA Approval	19
Method to Quantify Treatment Pond Pollutant Load	27
Load Tracking Mechanisms.....	54
Options for Permittees in TMDL Watersheds	54
Options identified	54
Other possible options	55

TABLES

Table 1. 303(d) Listed Segments	4
Table 2. Applicable Water Quality Criteria.....	12
Table 3. York Run Watershed Summary Table.....	13
Table 4. Waste Load Allocations at Burd Operation.....	14

ATTACHMENTS

Attachment A	21
York Run Watershed Maps.....	21
Attachment B	23
Method for Addressing Section 303(d) Listings for pH	23
Attachment C	26
Method for Calculating Loads from Mine Drainage Treatment Facilities from Surface Mines	26
Attachment D	31
TMDLs By Segment.....	31
Attachment E	47
Excerpts Justifying Changes Between the 1996, 1998, and 2002 Section 303(d) Lists and Integrated Report/List (2004, 2006)	47
Attachment F	50

Water Quality Data Used In TMDL Calculations	50
Attachment G	53
TMDLs and NPDES Permitting Coordination	53
Attachment H	56
Comment and Response.....	56

TMDL¹
York Run Watershed
Fayette County, Pennsylvania

Introduction

This report presents the Total Maximum Daily Loads (TMDLs) developed for segments in the York Run Watershed (Attachment A). These were done to address the impairments noted on the 1996 Pennsylvania Section 303(d) list of impaired waters, required under the Clean Water Act, and covers one segment on that list and additional segments on later lists/reports. York Run was listed as impaired for metals. All impairments resulted from acid drainage from abandoned coalmines. The TMDL addresses the three primary metals associated with acid mine drainage (iron, manganese, aluminum) and pH.

Table 1. 303(d) Listed Segments										
State Water Plan (SWP) Subbasin: 19G										
HUC: 05020005 Lower Monogahela River										
Year	Miles	Use Designation	Assessment ID	Segment ID	DEP Stream Code	Stream Name	Designated Use	Data Source	Source	EPA 305(b) Cause Code
1996	1.3	*	*	4921	41360	York Run	WWF	305(b) Report	RE	Metals
1998	1.32	*	*	4921	41360	York Run	WWF	SWMP	AMD	Metals
2002	1.3	*	*	4921	41360	York Run	WWF	SWMP	AMD	Metals
2002	1.8	*	*	990102-1105-TVP	41360	York Run	WWF	SWMP	AMD	Metals pH
2004	1.3	*	*	4921	41360	York Run	WWF	SWMP	AMD	Metals
2004	1.8	*	*	990102-1105-TVP	41360	York Run	WWF	SWMP	AMD	Metals pH
2006	1.33	Aquatic Life	7621	*	41360	York Run	WWF	SWMP	AMD	Metals
	1.75	Aquatic Life	10063	*						Metals pH
	5.44	Aquatic Life	11663	*						Metals
2006	1.47	Aquatic Life	11663	*	41362	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.25	Aquatic Life	11663	*	41363	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.38	Aquatic Life	11663	*	41364	York Run, Unt	WWF	SWMP	AMD	Metals
2006	2.76	Aquatic Life	11663	*	41365	York Run, Unt	WWF	SWMP	AMD	Metals

¹ Pennsylvania's 1996, 1998, and 2002 Section 303(d) lists and the 2004 and 2006 Integrated Water Quality Report were approved by the Environmental Protection Agency (EPA). The 1996 Section 303(d) list provides the basis for measuring progress under the 1997 lawsuit settlement of *American Littoral Society and Public Interest Group of Pennsylvania v. EPA*.

2006	1.2	Aquatic Life	11663	*	41366	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.63	Aquatic Life	11663	*	41367	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.91	Aquatic Life	11663	*	41368	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.4	Aquatic Life	11663	*	41369	York Run, Unt	WWF	SWMP	AMD	Metals
2006	2.92	Aquatic Life	11663	*	41370	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.18	Aquatic Life	11663	*	41371	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.75	Aquatic Life	11663	*	41372	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.04	Aquatic Life	11663	*	41373	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.08	Aquatic Life	11663	*	41374	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.07	Aquatic Life	11663	*	41375	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.95	Aquatic Life	11663	*	41376	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.92	Aquatic Life	11663	*	41377	York Run, Unt	WWF	SWMP	AMD	Metals
2006	1.24	Aquatic Life	11663	*	41378	York Run, Unt	WWF	SWMP	AMD	Metals
2006	0.84	Aquatic Life	11663	*	41379	York Run, Unt	WWF	SWMP	AMD	Metals

Resource Extraction=RE

Warm Water Fish = WWF

Surface Water Monitoring Program = SWMP

Abandoned Mine Drainage = AMD

See Attachment D, *Excerpts Justifying Changes Between the 1996, 1998, and 2002 Section 303(d) Lists and the 2004 and 2006 Integrated Water Quality Report*. The use designations for the stream segments in this TMDL can be found in PA Title 25 Chapter 93.

Directions to the York Run Watershed

The York Run Watershed is located in southwestern Pennsylvania, occupying the western portions of Fayette County in Nicholson and Georges Townships. The watershed is located on the Smithfield 7.5' quadrangle U.S. Geologic Survey map. The area within the watershed is approximately 16 square miles. York Run drains to Georges Creek, intersecting Georges Creek about 2 miles southwest of the town of Smithfield.

York Run can be accessed by taking U.S. Route 119 south from Uniontown. Turning west on any road off of Route 119 will lead to York Run, as the stream parallels Route 119 for much of its length. The upper headwaters of York Run can be reached by taking Route 43 west off Route 119. Township Roads T-502, T-521, T-373, or T-335 west from Route 119 all cross York Run as does State Route 3010 or 3009.

Hydrology and Geology

York Run is part of the Monongahela River Basin. The watershed area is located in the Allegheny Plateau Physiographic Province. The part of the plateau that contains York Run

consists of gently rolling hills and moderately to shallowly incised stream valleys. The maximum elevation on several hilltops in the watershed is 1,300 to 1,320 feet above sea level, but the majority of hilltops have maximum elevation of 1,150 to 1,200 feet. The minimum elevation in the York Run Watershed is at the confluence point of York Run and Georges Creek at 980 feet above sea level.

Geologically, the watershed is on the western flank of the Uniontown Syncline. The axis of the syncline trends northeast and southwest and is located one mile east of the main branch of York Run. The flanks of the syncline are very gently dipping.

Land uses with the York Run Watershed include agricultural, abandoned mine lands, large abandoned coke operations, rural residential properties, and small communities. The towns in the watershed include (from the headwaters to the confluence with Georges Creek) Amend, Chadville, Collier, Shoaf, York Run, Bowood, Smithfield, and Woodside. No large housing developments or projects are expected in this watershed at this time.

The entire Monongahela Group make up the exposed geologic formations found in this watershed. Most of the watershed area has been greatly disturbed by surface mining, deep mining, coal refuse piles, and coke operations. The entire northern half of the watershed has abandoned underground Pittsburgh coal seam mines beneath it; there are dozens of Pittsburgh coal seam surface mines also. There are also dozens of surface mines on the Redstone and Sewickley Coal seams as well as Sewickley underground mines in this watershed, and a handful of Uniontown coal seam and Waynesburg coal seam surface mines in the northern edge of the watershed.

Segments addressed in this TMDL

York Run is affected by pollution from AMD. This pollution has caused high levels of metals, and in some cases low pH, in the watershed. There is one active mining operation in the watershed, T.L. Hill Coal Company Burd Mine (SMP26970106; NPDES PA0202061). The TMDLs will be expressed as long-term, average loadings. Due to the nature and complexity of mining effects on the watershed, expressing the TMDL as a long-term average gives a better representation of the data used for the calculations. See Table 3 for TMDL calculations and Attachment D for TMDL explanations.

This AMD TMDL document contains one or more future mining Waste Load Allocations (WLA). This (these) WLA(s) were requested by the (Knox, Moshannon, Greensburg, Cambria or Pottsville) District Mining Office (DMO) to accommodate one or more future mining operations. The District Mining Office determined the number of and location of the future mining WLAs. This will allow speedier approval of future mining permits without the time-consuming process of amending this TMDL document. All comments and questions concerning the future mining WLAs in this TMDL are to be directed to the appropriate DMO. Future wasteload allocations are calculated using the method described for quantifying pollutant load in Attachment C.

The following are examples of what is or is not intended by the inclusion of future mining WLAs. This list is by way of example and is not intended to be exhaustive or exclusive:

1. The inclusion of one or more future mining WLAs is not intended to exclude the issuance of future non-mining NPDES permits in this watershed or any waters of the Commonwealth.
2. The inclusion of one or more future mining WLAs in specific segments of this watershed is not intended to exclude future mining in any segments of this watershed that does not have a future mining WLA.
3. The inclusion of future mining WLAs does not preclude the amending of this AMD TMDL to accommodate additional NPDES permits.

All of the remaining discharges in the watershed are from abandoned mines and will be treated as non-point sources. The distinction between non-point and point sources in this case is determined on the basis of whether or not there is a responsible party for the discharge. TMDLs will be expressed as long-term, average loadings. Due to the nature and complexity of mining effects on the watershed, expressing the TMDL as a long-term average gives a better representation of the data used for the calculations. See Attachment D for TMDL calculations.

Clean Water Act Requirements

Section 303(d) of the 1972 Clean Water Act requires states, territories, and authorized tribes to establish water quality standards. The water quality standards identify the uses for each waterbody and the scientific criteria needed to support that use. Uses can include designations for drinking water supply, contact recreation (swimming), and aquatic life support. Minimum goals set by the Clean Water Act require that all waters be “fishable” and “swimmable.”

Additionally, the federal Clean Water Act and the Environmental Protection Agency’s (EPA) implementing regulations (40 CFR Part 130) require:

- States to develop lists of impaired waters for which current pollution controls are not stringent enough to meet water quality standards (the list is used to determine which streams need TMDLs);
- States to establish priority rankings for waters on the lists based on severity of pollution and the designated use of the waterbody; states must also identify those waters for which TMDLs will be developed and a schedule for development;
- States to submit the list of waters to EPA every two years (April 1 of the even numbered years);
- States to develop TMDLs, specifying a pollutant budget that meets state water quality standards and allocate pollutant loads among pollution sources in a watershed, e.g., point and nonpoint sources; and
- EPA to approve or disapprove state lists and TMDLs within 30 days of final submission.

Despite these requirements, states, territories, authorized tribes, and EPA had not developed many TMDLs. Beginning in 1986, organizations in many states filed lawsuits against the EPA for failing to meet the TMDL requirements contained in the federal Clean Water Act and its implementing regulations. While EPA has entered into consent agreements with the plaintiffs in several states, other lawsuits still are pending across the country.

In the cases that have been settled to date, the consent agreements require EPA to backstop TMDL development, track TMDL development, review state monitoring programs, and fund studies on issues of concern (e.g., AMD, implementation of nonpoint source Best Management Practices (BMPs), etc.).

These TMDLs were developed in partial fulfillment of the 1997 lawsuit settlement of *American Littoral Society and Public Interest Group of Pennsylvania v. EPA*.

Section 303(d) Listing Process

Prior to developing TMDLs for specific waterbodies, there must be sufficient data available to assess which streams are impaired and should be on the Section 303(d) list. With guidance from the EPA, the states have developed methods for assessing the waters within their respective jurisdictions.

The primary method adopted by the Pennsylvania Department of Environmental Protection (DEP) for evaluating waters changed between the publication of the 1996 and 1998 Section 303(d) lists. Prior to 1998, data used to list streams were in a variety of formats, collected under differing protocols. Information also was gathered through the Section 305(b)² reporting process. DEP is now using the Statewide Surface Waters Assessment Protocol (SSWAP), a modification of the EPA's 1989 Rapid Bioassessment Protocol II (RBP-II), as the primary mechanism to assess Pennsylvania's waters. The SSWAP provides a more consistent approach to assessing Pennsylvania's streams.

The assessment method requires selecting representative stream segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selects as many sites as necessary to establish an accurate assessment for a stream segment; the length of the assessed stream segment can vary between sites. All the biological surveys included kick-screen sampling of benthic macroinvertebrates and habitat evaluations. Benthic macroinvertebrates are identified to the family level in the field.

After the survey is completed, the biologist determines the status of the stream segment. The decision is based on habitat scores and a series of narrative biological statements used to evaluate the benthic macroinvertebrate community. If the stream is determined to be impaired, the source and cause of the impairment is documented. An impaired stream must be listed on the state's Section 303(d) list with the source and cause. A TMDL must be developed for the stream segment and each pollutant. In order for the process to be more effective, adjoining stream

² Section 305(b) of the Clean Water Act requires a biannual description of the water quality of the waters of the state.

segments with the same source and cause listing are addressed collectively, and on a watershed basis.

Basic Steps for Determining a TMDL

Although all watersheds must be handled on a case-by-case basis when developing TMDLs, there are basic processes or steps that apply to all cases. They include:

1. Collection and summarization of pre-existing data (watershed characterization, inventory contaminant sources, determination of pollutant loads, etc.);
2. Calculating the TMDL for the waterbody using EPA approved methods and computer models;
3. Allocating pollutant loads to various sources;
4. Determining critical and seasonal conditions;
5. Public review and comment and comment period on draft TMDL;
6. Submittal of final TMDL; and
7. EPA approval of the TMDL.

Watershed History

The majority of abandoned deep mines and refuse piles in the York Run Watershed are from the Pittsburgh and Sewickley coal mines. Abandoned mine drainage discharges severely impact York Run and its tributaries throughout the entire watershed, but especially the northern headwaters. About half of the surface mines in this watershed were unpermitted and are currently abandoned or reclaimed. There are well over 1,000 acres of abandoned mine lands in the watershed. The rest of the mining-impacted acreage was permitted, mined and reclaimed. In a watershed assessment written for Georges Creek (the receiving stream which is heavily polluted by AMD) the greatest negative water quality impacts noted to Georges Creek were from York Run. In fact, the Pennsylvania Fish and Boat Commission, in a report on Georges Creek, identified York Run as the single most limiting factor to sustainable fish populations. There is one active surface mining permit in the watershed, the T.L. Hill Coal Company Burd Mine (SMP 26970106; NPDES PA0202061) in Georges Township, Fayette County.

AMD Methodology

A two-step approach is used for the TMDL analysis of AMD impaired stream segments. The first step uses a statistical method for determining the allowable instream concentration at the point of interest necessary to meet water quality standards. This is done at each point of interest (sample point) in the watershed. The second step is a mass balance of the loads as they pass through the watershed. Loads at these points will be computed based on average annual flow.

The statistical analysis described below can be applied to situations where all of the pollutant loading is from non-point sources as well as those where there are both point and non-point sources. The following defines what are considered point sources and non-point sources for the purposes of our evaluation; point sources are defined as permitted discharges or a discharge that has a responsible party, non-point sources are then any pollution sources that are not point sources. For situations where all of the impact is due to non-point sources, the equations shown

below are applied using data for a point in the stream. The load allocation made at that point will be for all of the watershed area that is above that point. For situations where there are point-source impacts alone, or in combination with non-point sources, the evaluation will use the point-source data and perform a mass balance with the receiving water to determine the impact of the point source.

Allowable loads are determined for each point of interest using Monte Carlo simulation. Monte Carlo simulation is an analytical method meant to imitate real-life systems, especially when other analyses are too mathematically complex or too difficult to reproduce. Monte Carlo simulation calculates multiple scenarios of a model by repeatedly sampling values from the probability distribution of the uncertain variables and using those values to populate a larger data set. Allocations were applied uniformly for the watershed area specified for each allocation point. For each source and pollutant, it was assumed that the observed data were log-normally distributed. Each pollutant source was evaluated separately using @Risk³ by performing 5,000 iterations to determine the required percent reduction so that the water quality criteria, as defined in the *Pennsylvania Code. Title 25 Environmental Protection, Department of Environmental Protection, Chapter 93, Water Quality Standards*, will be met instream at least 99 percent of the time. For each iteration, the required percent reduction is:

$$PR = \max\{0, (1 - Cc/Cd)\} \text{ where} \quad (1)$$

PR = required percent reduction for the current iteration

Cc = criterion in mg/l

Cd = randomly generated pollutant source concentration in mg/l based on the observed data

$$Cd = \text{RiskLognorm}(\text{Mean}, \text{Standard Deviation}) \text{ where} \quad (1a)$$

Mean = average observed concentration

Standard Deviation = standard deviation of observed data

The overall percent reduction required is the 99th percentile value of the probability distribution generated by the 5,000 iterations, so that the allowable long-term average (LTA) concentration is:

$$LTA = Mean * (1 - PR99) \text{ where} \quad (2)$$

LTA = allowable LTA source concentration in mg/l

³ @Risk – Risk Analysis and Simulation Add-in for Microsoft Excel, Palisade Corporation, Newfield, NY, 1990-1997.

Once the allowable concentration and load for each pollutant is determined, mass-balance accounting is performed starting at the top of the watershed and working down in sequence. This mass-balance or load tracking is explained below.

Load tracking through the watershed utilizes the change in measured loads from sample location to sample location, as well as the allowable load that was determined at each point using the @Risk program.

There are two basic rules that are applied in load tracking; rule one is that if the sum of the measured loads that directly affect the downstream sample point is less than the measured load at the downstream sample point it is indicative that there is an increase in load between the points being evaluated, and this amount (the difference between the sum of the upstream and downstream loads) shall be added to the allowable load(s) coming from the upstream points to give a total load that is coming into the downstream point from all sources. The second rule is that if the sum of the measured loads from the upstream points is greater than the measured load at the downstream point this is indicative that there is a loss of instream load between the evaluation points, and the ratio of the decrease shall be applied to the load that is being tracked (allowable load(s)) from the upstream point.

Tracking loads through the watershed gives the best picture of how the pollutants are affecting the watershed based on the information that is available. The analysis is done to insure that water quality standards will be met at all points in the stream. The TMDL must be designed to meet standards at all points in the stream, and in completing the analysis, reductions that must be made to upstream points are considered to be accomplished when evaluating points that are lower in the watershed. Another key point is that the loads are being computed based on average annual flow and should not be taken out of the context for which they are intended, which is to depict how the pollutants affect the watershed and where the sources and sinks are located spatially in the watershed.

For pH TMDLs, acidity is compared to alkalinity as described in Attachment B. Each sample point used in the analysis of pH by this method must have measurements for total alkalinity and hot acidity. Statistical procedures are applied, using the average value for total alkalinity at that point as the target to specify a reduction in the acid concentration. By maintaining a net alkaline stream, the pH value will be in the range between six and eight. This method negates the need to specifically compute the pH value, which for streams affected by low pH from AMD may not be a true reflection of acidity. This method assures that Pennsylvania's standard for pH is met when the acid concentration reduction is met.

Information for the TMDL analysis performed using the methodology described above is contained in the "TMDLs by Segment" section of this report.

TMDL Endpoints

One of the major components of a TMDL is the establishment of an instream numeric endpoint, which is used to evaluate the attainment of applicable water quality. An instream numeric endpoint, therefore, represents the water quality goal that is to be achieved by implementing the

load reductions specified in the TMDL. The endpoint allows for a comparison between observed instream conditions and conditions that are expected to restore designated uses. The endpoint is based on either the narrative or numeric criteria available in water quality standards.

Because most of the pollution sources in the watershed are nonpoint sources, the TMDLs' component makeup will be load allocations (LAs) with waste load allocations (WLAs) for permitted discharges. All allocations will be specified as long-term average daily concentrations. These long-term average concentrations are expected to meet water-quality criteria 99% of the time as required in PA Title 25 Chapter 96.3(c). The following table shows the applicable water-quality criteria for the selected parameters.

Table 2. Applicable Water Quality Criteria

Parameter	Criterion Value (mg/l)	Total Recoverable/Dissolved
Aluminum (Al)	0.75	Total Recoverable
Iron (Fe)	1.50	30 day average; Total Recoverable
Manganese (Mn)	1.00	Total Recoverable
pH *	6.0-9.0	N/A

*The pH values shown will be used when applicable. In the case of freestone streams with little or no buffering capacity, the TMDL endpoint for pH will be the natural background water quality.

TMDL Elements (WLA, LA, MOS)

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS}$$

A TMDL equation consists of a waste load allocation (WLA), load allocation (LA), and a margin of safety (MOS). The waste load allocation is the portion of the load assigned to point sources. The load allocation is the portion of the load assigned to non-point sources. The margin of safety is applied to account for uncertainties in the computational process. The margin of safety may be expressed implicitly (documenting conservative processes in the computations) or explicitly (setting aside a portion of the allowable load). The TMDL allocations in this report are based on available data. Other allocation schemes could also meet the TMDL.

Allocation Summary

These TMDLs will focus remediation efforts on the identified numerical reduction targets for each watershed. The reduction schemes in Table 3 for each segment are based on the assumption that all upstream allocations are implemented and take into account all upstream reductions. Attachment D contains the TMDLs by segment analysis for each allocation point in a detailed discussion. As changes occur in the watershed, the TMDLs may be re-evaluated to reflect current conditions. An implicit MOS based on conservative assumptions in the analysis is included in the TMDL calculations.

The allowable LTA concentration in each segment is calculated using Monte Carlo Simulation as described previously. The allowable load is then determined by multiplying the allowable concentration by the average flow and a conversion factor at each sample point. The allowable load is the TMDL at that point.

Each permitted discharge in a segment is assigned a waste load allocation and the total waste load allocation for each segment is included in this table. Waste load allocations have also been included at some points for future mining operations. The difference between the TMDL and the WLA at each point is the load allocation (LA) at the point. The LA at each point includes all loads entering the segment, including those from upstream allocation points. The percent reduction is calculated to show the amount of load that needs to be reduced from nonpoint sources within a segment in order for water quality standards to be met at the point.

In some instances, instream processes, such as settling, are taking place within a stream segment. These processes are evidenced by a decrease in measured loading between consecutive sample points. It is appropriate to account for these losses when tracking upstream loading through a segment. The calculated upstream load lost within a segment is proportional to the difference in the measured loading between the sampling points.

Table 3. York Run Watershed Summary Table

Parameter	Existing Load (lbs/day)	TMDL Allowable Load (lbs/day)	WLA (lbs/day)	LA (lbs/day)	NPS Load Reduction (lbs/day)	NPS % Reduction
York10 - Headwaters of York Run near town of York Run						
Aluminum (lbs/day)	152.56	24.67	1.96	22.71	127.89	84%
Iron (lbs/day)	3258.81	95.59	7.91	87.68	3163.22	97%
Manganese(lbs/day)	266.91	75.64	5.25	70.39	191.27	72%
Acidity (lbs/day)	0	0	-	NA	NA	NA
York09 - York Run near Sleepy Hollow Rd.						
Aluminum (lbs/day)	200.83	31.73	1.68	30.05	41.21	57%*
Iron (lbs/day)	3075.46	101.33	6.78	94.55	0.00	0%*
Manganese(lbs/day)	289.40	76.20	4.50	71.70	21.93	23%*
Acidity (lbs/day)	0	0	0	NA	NA	NA
York08 - York Run near York Run Junction						
Aluminum (lbs/day)	389.51	27.06	1.68	25.38	193.35	88%*
Iron (lbs/day)	2892.40	102.89	6.78	96.11	0.00	0%*
Manganese(lbs/day)	311.50	82.85	4.50	78.35	15.45	16%*
Acidity (lbs/day)	0	0	0	NA	NA	NA
York07 – Unnamed Tributary 41370 to York Run						
Aluminum (lbs/day)	817.66	7.79	0	7.79	809.87	99%
Iron (lbs/day)	373.36	13.71	0	13.71	359.65	97%
Manganese(lbs/day)	73.19	13.15	0	13.15	60.04	83%
Acidity (lbs/day)	7017.24	0.00	0	0.00	7017.24	100%
York06 - York Run at Church Street						
Aluminum (lbs/day)	1119.28	55.53	1.68	53.85	0.00	0%*
Iron (lbs/day)	3399.63	158.92	6.78	152.14	91.55	37%*
Manganese(lbs/day)	408.19	94.75	4.50	90.25	24.75	21%*
Acidity (lbs/day)	5335.06	671.06	0	676.06	0.00	0%*
York05 - York Run at Smithfield Rd						
Aluminum (lbs/day)	1356.18	74.91	1.68	73.23	217.52	75%*

Parameter	Existing Load (lbs/day)	TMDL Allowable Load (lbs/day)	WLA (lbs/day)	LA (lbs/day)	NPS Load Reduction (lbs/day)	NPS % Reduction
Iron (lbs/day)	3435.55	183.52	6.78	176.74	11.32	6%*
Manganese(lbs/day)	453.21	105.65	4.50	101.15	34.12	25%*
Acidity (lbs/day)	6978.17	415.49	0	415.49	1898.68	82%*
York04- Unnamed Tributary 41362 to York Run						
Aluminum (lbs/day)	56.21	1.65	0	1.65	54.56	97%
Iron (lbs/day)	5.73	3.80	0	3.80	1.93	34%
Manganese(lbs/day)	7.36	3.49	0	3.49	3.87	53%
Acidity (lbs/day)	111.91	14.93	0	14.93	96.98	87%*
York02 – Unnamed Tributary 41361 to York Run						
Aluminum (lbs/day)	0.13	0.13	0	NA	NA	NA
Iron (lbs/day)	0.44	0.44	0	NA	NA	NA
Manganese(lbs/day)	0.08	0.08	0	NA	NA	NA
Acidity (lbs/day)	0	0	0	NA	NA	NA
York01 – York Run at Mouth						
Aluminum (lbs/day)	1511.81	87.93	1.68	86.25	88.05	50%*
Iron (lbs/day)	3878.08	171.90	6.78	165.12	452.22	73%*
Manganese(lbs/day)	486.20	125.76	4.50	121.26	9.01	7%*
Acidity (lbs/day)	6871.26	444.25	0	444.25	0.00	0%*

NA = not applicable ND = not detected

* Takes into account load reductions from upstream sources.

Numbers in italics are set aside for future mining operations.

In the instance that the allowable load is equal to the existing load (e.g. iron point York02, Table 3), the simulation determined that water quality standards are being met instream 99% of the time and no TMDL is necessary for the parameter at that point. Although no TMDL is necessary, the loading at the point is considered at the next downstream point. This is denoted as “NA” in the above table.


Waste Load Allocation –T.L. Hill Coal Company, Burd Mine

The T.L. Hill Coal Company (SMP26970106; NPDES PA0202061) Burd Operation has seven discharges requiring treatment. Outfalls 006, 007, 008, 009, 010, 011, and 012 are discharges from treatment ponds. These discharges do not have effluent limits for aluminum currently; a concentration of 0.75 mg/L was assigned to the discharge for aluminum in the effluent. The following table shows the waste load allocation for this discharge.

Table 4. Waste Load Allocations at Burd Operation			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
006			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75

007			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
008			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
009			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
010			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
011			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
012			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75

Following is an example of how the allocations, presented in Table 3, for a stream segment are calculated. For this example, aluminum allocations for YORK09 of York Run are shown. As demonstrated in the example, all upstream contributing loads are accounted for at each point. Attachment C contains the TMDLs by segment analysis for each allocation point in a detailed discussion. These analyses follow the example. Attachment A contains maps of the sampling point locations for reference.

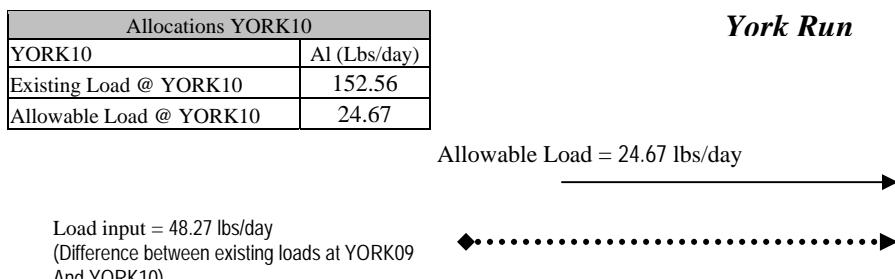

ALLOCATIONS YORK09	
YORK09	Al (Lbs/day)
Existing Load @ YORK09	200.83
Difference in measured Loads between the loads that enter and existing YORK09 (YORK09-(YORK10))	48.27
Additional load tracked from above samples	24.67
Total load tracked between YORK10 and YORK09	72.94
Allowable Load @ YORK09	31.73
Load Reduction @ YORK09	41.21
% Reduction required at YORK09	57%

Allowable Load = 31.73 lbs/day

The allowable aluminum load tracked from YORK10 was 24.67 lbs/day. The existing load at YORK10 was subtracted from the existing load at YORK09 to show the actual measured increase of aluminum load that has entered the stream between these upstream sites and YORK09 (48.27 lbs/day). This increased value was then added to the calculated allowable load from YORK10 to calculate the total load that was tracked between YORK10 and YORK09 (allowable loads @ YORK10 + the difference in existing load between YORK10 and YORK09). This total load tracked was then subtracted from the calculated allowable load at YORK09 to determine the amount of load to be reduced at YORK09. This total load value was found to be 72.94 lbs/day; it was 41.21 lbs/day greater than the YORK09 allowable load of 31.73 lbs/day. Therefore, a 57% aluminum reduction at YORK09 is necessary.

Recommendations

There are no known major discharges that are the predominant source of acid mine drainage loading into York Run. There are numerous small ones. To date, no projects have been implemented in the watershed to reduce AMD pollution. However, the Greensburg District Mining Office has issued surface mining permits for abandoned mine land reclamation and acid mine drainage abatement work. Continued permitting with abandoned mine land work and Government Financed Construction Contract work from the district mining office, especially on the Sewickley and Pittsburgh coal seams, will result in further improvements in this watershed.

Various methods to eliminate or treat pollutant sources and to provide a reasonable assurance that the proposed TMDLs can be met exist in Pennsylvania. These methods include PADEP's primary efforts to improve water quality through reclamation of abandoned mine lands (for abandoned mining) and through the National Pollution Discharge Elimination System (NPDES) permit program (for active mining). Funding sources available that are currently being used for projects designed to achieve TMDL reductions include the Environmental Protection Agency (EPA) 319 grant program and Pennsylvania's Growing Greener Program. Federal funding is through the Department of the Interior, Office of Surface Mining (OSM), for reclamation and mine drainage treatment through the Appalachian Clean Streams Initiative and through Watershed Cooperative Agreements.

OSM reports that nationally, of the \$8.5 billion of high priority (defined as priority 1&2 features or those that threaten public health and safety) coal related AML problems in the AML

inventory, \$6.6 billion (78%) have yet to be reclaimed; \$3.6 billion of this total is attributable to Pennsylvania watershed costs. Almost 83 percent of the \$2.3 billion of coal related environmental problems (priority 3) in the AML inventory are not reclaimed.

The Bureau of Abandoned Mine Reclamation, Pennsylvania's primary bureau in dealing with abandoned mine reclamation (AMR) issues, has established a comprehensive plan for abandoned mine reclamation throughout the Commonwealth to prioritize and guide reclamation efforts for throughout the state to make the best use of valuable funds

(www.dep.state.pa.us/dep/deputate/minres/bamr/complan1.htm). In developing and implementing a comprehensive plan for abandoned mine reclamation, the resources (both human and financial) of the participants must be coordinated to insure cost-effective results. The following set of principles is intended to guide this decision making process:

- Partnerships between the DEP, watershed associations, local governments, environmental groups, other state agencies, federal agencies and other groups organized to reclaim abandoned mine lands are essential to achieving reclamation and abating acid mine drainage in an efficient and effective manner.
- Partnerships between AML interests and active mine operators are important and essential in reclaiming abandoned mine lands.
- Preferential consideration for the development of AML reclamation or AMD abatement projects will be given to watersheds or areas for which there is an approved rehabilitation plan. (guidance is given in Appendix B to the Comprehensive Plan).
- Preferential consideration for the use of designated reclamation moneys will be given to projects that have obtained other sources or means to partially fund the project or to projects that need the funds to match other sources of funds.
- Preferential consideration for the use of available moneys from federal and other sources will be given to projects where there are institutional arrangements for any necessary long-term operation and maintenance costs.
- Preferential consideration for the use of available moneys from federal and other sources will be given to projects that have the greatest worth.
- Preferential consideration for the development of AML projects will be given to AML problems that impact people over those that impact property.
- No plan is an absolute; occasional deviations are to be expected.

A detailed decision framework is included in the plan that outlines the basis for judging projects for funding, giving high priority to those projects whose cost/benefit ratios are most favorable and those in which stakeholder and landowner involvement is high and secure.

In addition to the abandoned mine reclamation program, regulatory programs also are assisting in the reclamation and restoration of Pennsylvania's land and water. PADEP has been effective in implementing the NPDES program for mining operations throughout the Commonwealth. This reclamation was done through the use of remining permits that have the potential for reclaiming abandoned mine lands, at no cost to the Commonwealth or the federal government. Long-term treatment agreements were initialized for facilities/operators who need to assure treatment of post-mining discharges or discharges they degraded which will provide for long-term treatment of discharges. According to OSM, "PADEP is conducting a program where active mining sites are, with very few exceptions, in compliance with the approved regulatory program".

The Commonwealth is exploring all options to address its abandoned mine problem. During 2000-2006, many new approaches to mine reclamation and mine drainage remediation have been explored and projects funded to address problems in innovative ways. These include:

- Project XL - The Pennsylvania Department of Environmental Protection ("PADEP"), has proposed this XL Project to explore a new approach to encourage the remining and reclamation of abandoned coal mine sites. The approach would be based on compliance with in-stream pollutant concentration limits and implementation of best management practices ("BMPs"), instead of National Pollutant Discharge Elimination System ("NPDES") numeric effluent limitations measured at individual discharge points. This XL project would provide for a test of this approach in up to eight watersheds with significant acid mine drainage ("AMD") pollution. The project will collect data to compare in-stream pollutant concentrations versus the loading from individual discharge points and provide for the evaluation of the performance of BMPs and this alternate strategy in PADEP's efforts to address AMD.
- Awards of grants for 1) proposals with economic development or industrial application as their primary goal and which rely on recycled mine water and/or a site that has been made suitable for the location of a facility through the elimination of existing Priority 1 or 2 hazards, and 2) new and innovative mine drainage treatment technologies that will provide waters of higher purity that may be needed by a particular industry at costs below conventional treatment costs as in common use today or reduce the costs of water treatment below those of conventional lime treatment plants. Eight contracts totaling \$4.075 M were awarded in 2006 under this program.
- Projects using water from mine pools in an innovative fashion, such as the Shannopin Deep Mine Pool (in southwestern Pennsylvania), the Barnes & Tucker Deep Mine Pool (the Susquehanna River Basin Commission into the Upper West Branch Susquehanna River), and the Wadesville Deep Mine Pool (Exelon Generation in Schuylkill County).

The Georges Creek Clearwater Cooperative Initiative is a watershed organization interested in the Georges Creek Watershed, of which York Run is a tributary. It is recommended that agencies support local interests to implement remediation projects in the watershed to abate effects of AMD pollution.

Candidate or federally-listed threatened and endangered species may occur in or near the watershed. While implementation of the TMDL should result in improvements to water quality, they could inadvertently destroy habitat for candidate or federally-listed species. TMDL

implementation projects should be screened through the Pennsylvania Natural Diversity Inventory (PNDI) early in their planning process, in accordance with the Department's policy titled Policy for Pennsylvania Natural Diversity Inventory (PNDI) Coordination During Permit Review and Evaluation (Document ID# 400-0200-001).

Public Participation

Public notice of the draft TMDL was published in the *Pennsylvania Bulletin* and *The Herald Standard* on January 9, 2008 to foster public comment on the allowable loads calculated. The public comment period on this TMDL was open January 9, 2008 to March 19, 2008. A public meeting was held on January 23, 2008 at the Fayette County Health Center to discuss the proposed TMDL.

Future TMDL Modifications

In the future, the Department may adjust the load and/or wasteload allocations in this TMDL to account for new information or circumstances that are developed or discovered during the implementation of the TMDL when a review of the new information or circumstances indicate that such adjustments are appropriate. Adjustment between the load and wasteload allocation will only be made following an opportunity for public participation. A wasteload allocation adjustment will be made consistent and simultaneous with associated permit(s) revision(s)/reissuances (i.e., permits for revision/reissuance in association with a TMDL revision will be made available for public comment concurrent with the related TMDLs availability for public comment). New information generated during TMDL implementation may include, among other things, monitoring data, BMP effectiveness information, and land use information. All changes in the TMDL will be tallied and once the total changes exceed 1% of the total original TMDL allowable load, the TMDL will be revised. The adjusted TMDL, including its LAs and WLAs, will be set at a level necessary to implement the applicable WQS and any adjustment increasing a WLA will be supported by reasonable assurance demonstration that load allocations will be met. The Department will notify EPA of any adjustments to the TMDL within 30 days of its adoption and will maintain current tracking mechanisms that contain accurate loading information for TMDL waters.

Changes in TMDLs That May Require EPA Approval

- Increase in total load capacity.
- Transfer of load between point (WLA) and nonpoint (LA) sources.
- Modification of the margin of safety (MOS).
- Change in water quality standards (WQS).
- Non-attainment of WQS with implementation of the TMDL.
- Allocations in trading programs.


Changes in TMDLs That May Not Require EPA Approval

- Total loading shift less than or equal to 1% of the total load.

- Increase of WLA results in greater LA reductions provided reasonable assurance of implementation is demonstrated (a compliance/implementation plan and schedule).
- Changes among WLAs with no other changes; TMDL public notice concurrent with permit public notice.
- Removal of a pollutant source that will not be reallocated.
- Reallocation between LAs.
- Changes in land use.

Attachment A

York Run Watershed Maps

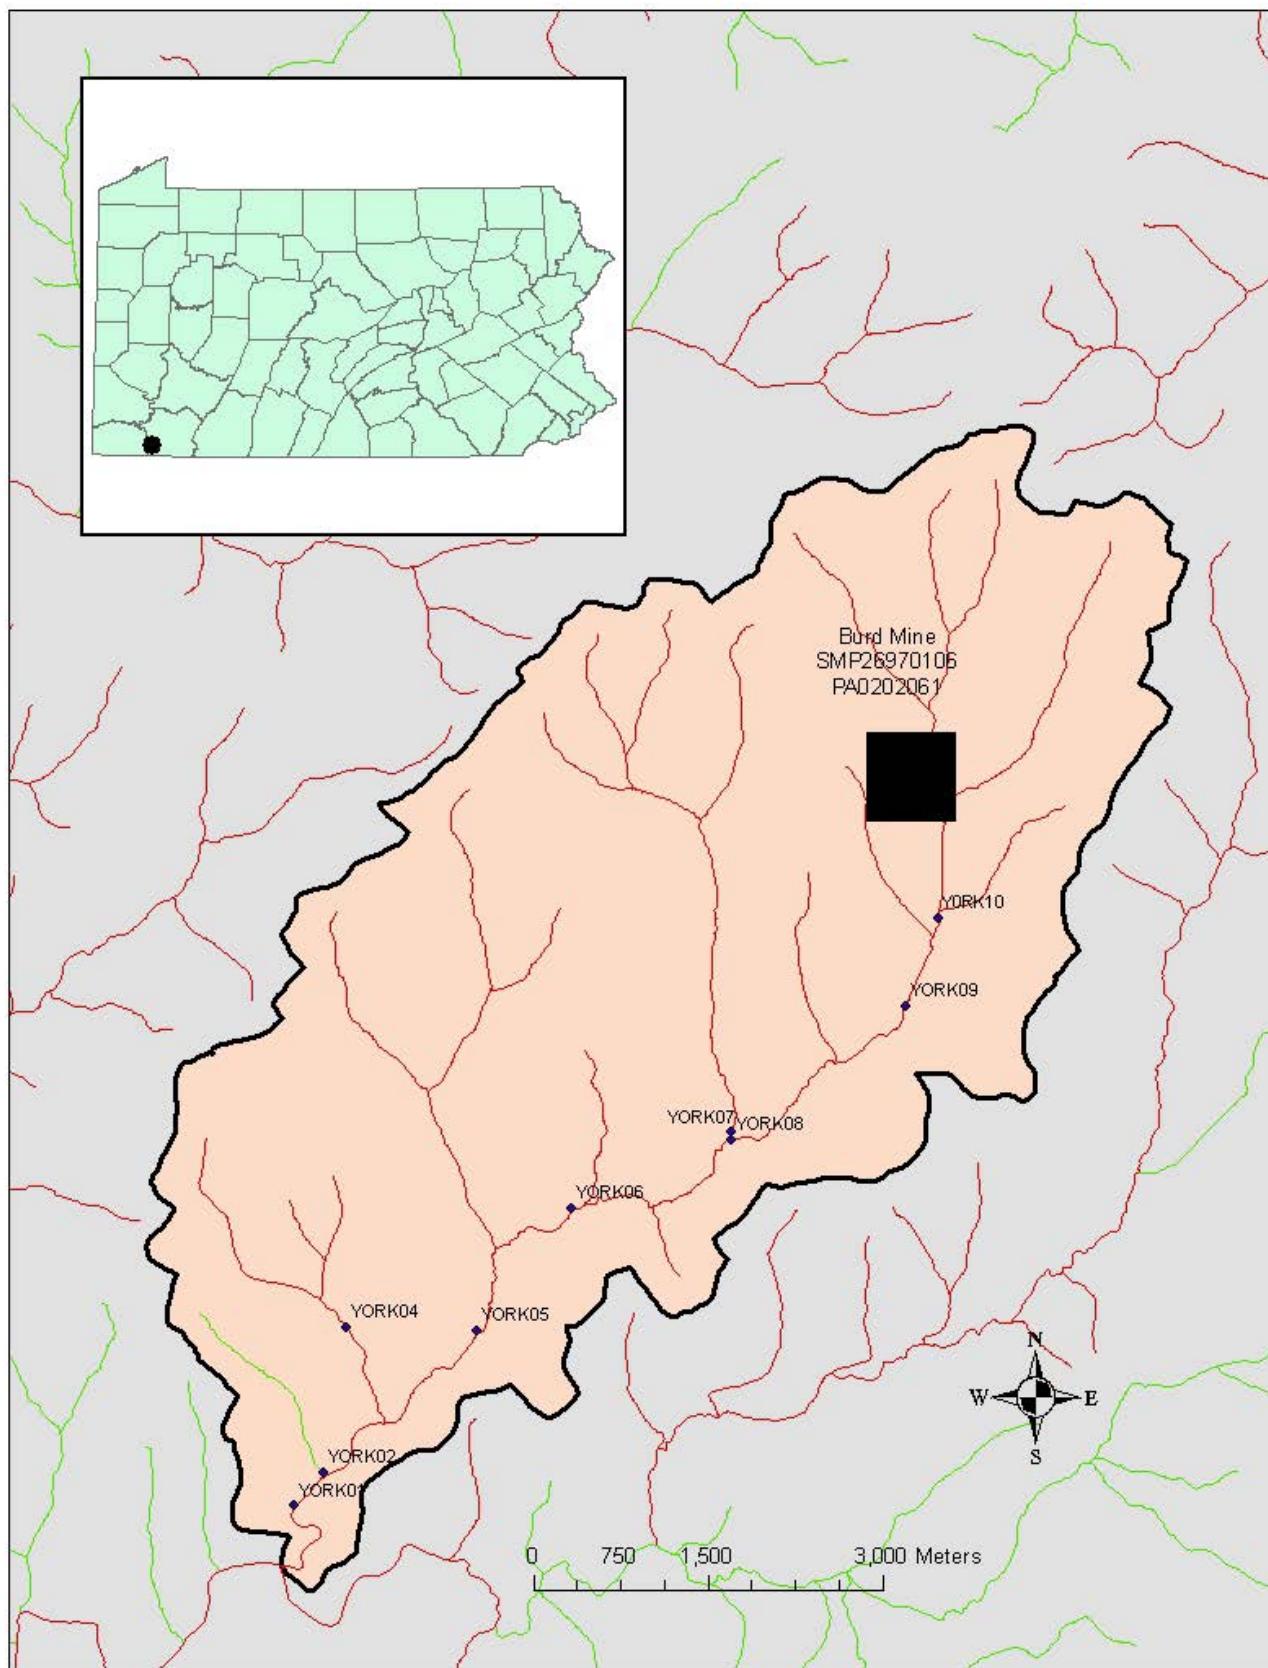

Attachment B

Method for Addressing Section 303(d) Listings for pH

Method for Addressing Section 303(d) Listings for pH

There has been a great deal of research conducted on the relationship between alkalinity, acidity, and pH. Research published by the Pa. Department of Environmental Protection demonstrates that by plotting net alkalinity (alkalinity-acidity) vs. pH for 794 mine sample points, the resulting pH value from a sample possessing a net alkalinity of zero is approximately equal to six (Figure 1). Where net alkalinity is positive (greater than or equal to zero), the pH range is most commonly six to eight, which is within the USEPA's acceptable range of six to nine and meets Pennsylvania water quality criteria in Chapter 93.

The pH, a measurement of hydrogen ion acidity presented as a negative logarithm, is not conducive to standard statistics. Additionally, pH does not measure latent acidity. For this reason, and based on the above information, Pennsylvania is using the following approach to address the stream impairments noted on the 303(d) list due to pH. The concentration of acidity in a stream is at least partially chemically dependent upon metals. For this reason, it is extremely difficult to predict the exact pH values, which would result from treatment of abandoned mine drainage. When acidity in a stream is neutralized or is restored to natural levels, pH will be acceptable. Therefore, the measured instream alkalinity at the point of evaluation in the stream will serve as the goal for reducing total acidity at that point. The methodology that is applied for alkalinity (and therefore pH) is the same as that used for other parameters such as iron, aluminum, and manganese that have numeric water quality criteria.

Each sample point used in the analysis of pH by this method must have measurements for total alkalinity and total acidity. The same statistical procedures that have been described for use in the evaluation of the metals is applied, using the average value for total alkalinity at that point as the target to specify a reduction in the acid concentration. By maintaining a net alkaline stream, the pH value will be in the range between six and eight. This method negates the need to specifically compute the pH value, which for mine waters is not a true reflection of acidity. This method assures that Pennsylvania's standard for pH is met when the acid concentration reduction is met.

Reference: *Rose, Arthur W. and Charles A. Cravotta, III 1998. Geochemistry of Coal Mine Drainage. Chapter 1 in Coal Mine Drainage Prediction and Pollution Prevention in Pennsylvania. Pa. Dept. of Environmental Protection, Harrisburg, Pa.*

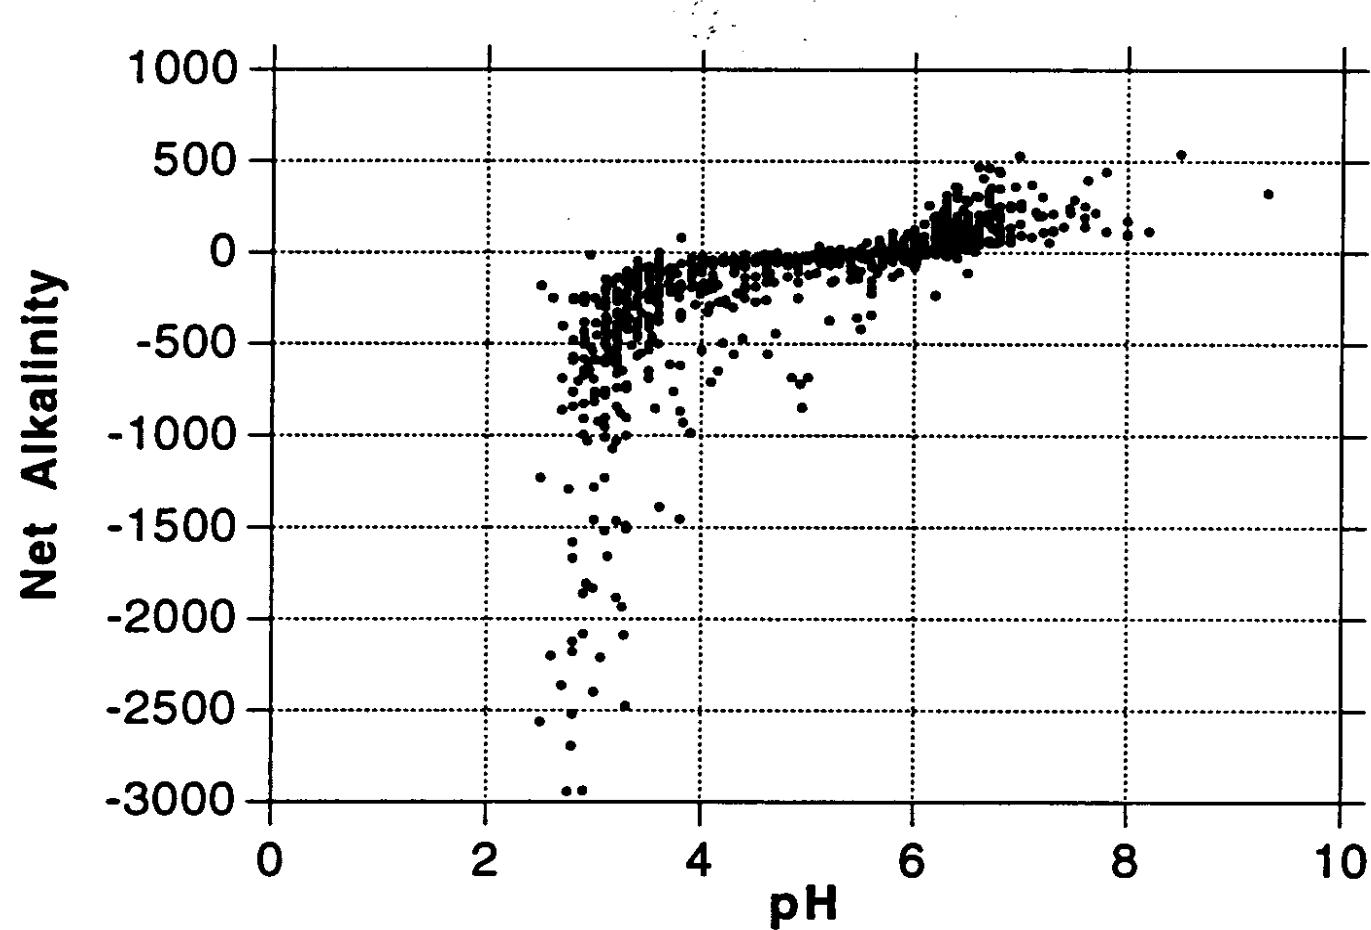


Figure 1. Net Alkalinity vs. pH. Taken from Figure 1.2 Graph C, pages 1-5, of Coal Mine Drainage Prediction and Pollution Prevention in Pennsylvania

Attachment C

**Method for Calculating Loads from Mine Drainage Treatment
Facilities from Surface Mines**

Method to Quantify Treatment Pond Pollutant Load

Calculating Waste Load Allocations for Active Mining in the TMDL Stream Segment.

The end product of the TMDL report is to develop Waste Load Allocations (WLA) and Load Allocations (LA) that represent the amount of pollution the stream can assimilate while still achieving in-stream limits. The LA is the load from abandoned mine lands where there is no NPDES permit or responsible party. The WLA is the pollution load from active mining that is permitted through NPDES.

In preparing the TMDL, calculations are done to determine the allowable load. The actual load measured in the stream is equal to the allowable load plus the reduced load.

$$\text{Total Measured Load} = \text{Allowed Load} + \text{Reduced Load}$$

If there is active mining or anticipated mining in the near future in the watershed, the allowed load must include both a WLA and a LA component.

$$\text{Allowed Load (lbs/day)} = \text{WLA (lbs/day)} + \text{LA (lbs/day)}$$

The following is an explanation of the quantification of the potential pollution load reporting to the stream from permitted pit water treatment ponds that discharge water at established effluent limits.

Surface coalmines remove soil and overburden materials to expose the underground coal seams for removal. After removal of the coal the overburden is replaced as mine spoil and the soil is replaced for revegetation. In a typical surface mining operation the overburden materials is removed and placed in the previous cut where the coal has been removed. In this fashion, an active mining operation has a pit that progresses through the mining site during the life of the mine. The pit may have water reporting to it, as it is a low spot in the local area. Pit water can be the result of limited shallow groundwater seepage, direct precipitation into the pit, and surface runoff from partially regarded areas that have been backfilled but not yet revegetated. Pit water is pumped to nearby treatment ponds where it is treated to the required treatment pond effluent limits. The standard effluent limits are as follows, although stricter effluent limits may be applied to a mining permit's effluent limits to insure that the discharge of treated water does not cause in-stream limits to be exceeded.

Standard Treatment Pond Effluent Limits:

Alkalinity > Acidity

$6.0 \leq \text{pH} \leq 9.0$

$\text{Fe} < 3.0 \text{ mg/l}$

$\text{Mn} < 2.0 \text{ mg/l}$

Discharge from treatment ponds on a mine site is intermittent and often varies as a result of precipitation events. Measured flow rates are almost never available. If accurate flow data are

available, they can be used to quantify the WLA. The following is an approach that can be used to determine a waste load allocation for an active mining operation when treatment pond flow rates are not available. The methodology involves quantifying the hydrology of the portion of a surface mine site that contributes flow to the pit and then calculating waste load allocation using NPDES treatment pond effluent limits.

The total water volume reporting to ponds for treatment can come from two primary sources: direct precipitation to the pit and runoff from the ungraded area following the pit's progression through the site. Groundwater seepage reporting to the pit is considered negligible compared to the flow rates resulting from precipitation.

In an active mining scenario, a mine operator pumps pit water to the ponds for chemical treatment. Pit water is often acidic with dissolved metals in nature. At the treatment ponds, alkaline chemicals are added to increase the pH and encourage dissolved metals to precipitate and settle. Pennsylvania averages 41.4 inches of precipitation per year (Mid-Atlantic River Forecast Center, National Weather Service, State College, PA, 1961-1990, <http://www.dep.state.pa.us/dep/subject/hotopics/drought/PrecipNorm.htm>). A maximum pit dimension without special permit approval is 1500 feet long by 300 feet wide. Assuming that 5 percent of the precipitation evaporates and the remaining 95 percent flows to the low spot in the active pit to be pumped to the treatment ponds, results in the following equation and average flow rates for the pit area.

$$\begin{aligned} 41.4 \text{ in. precip./yr} \times 0.95 \times 1 \text{ ft./12/in.} \times 1500' \times 300'/\text{pit} \times 7.48 \text{ gal/ft}^3 \times 1\text{yr}/365\text{days} \times 1\text{day}/24\text{hr.} \times 1\text{hr.}/60 \text{ min.} = \\ = 21.0 \text{ gal/min average discharge from direct precipitation into the open mining pit area.} \end{aligned}$$

Pit water can also result from runoff from the ungraded and revegetated area following the pit. In the case of roughly backfilled and highly porous spoil, there is very little surface runoff. It is estimated that 80 percent of precipitation on the roughly regarded mine spoil infiltrates, 5 percent evaporates, and 15 percent may run off to the pit for pumping and potential treatment (Jay Hawkins, Office of Surface Mining, Department of the Interior, Personal Communications 2003). Regrading and revegetation of the mine spoil is conducted as the mining progresses. DEP encourages concurrent backfilling and revegetation through its compliance efforts and it is in the interest of the mining operator to minimize the company's reclamation bond liability by keeping the site reclaimed and revegetated. Experience has shown that reclamation and revegetation is accomplished two to three pit widths behind the active mining pit area. DEP uses three pit widths as an area representing potential flow to the pit when reviewing the NPDES permit application and calculating effluent limits based on best available treatment technology and insuring that in-stream limits are met. The same approach is used in the following equation, which represents the average flow reporting to the pit from the ungraded and unrevegetated spoil area.

$$\begin{aligned} 41.4 \text{ in. precip./yr} \times 3 \text{ pit areas} \times 1 \text{ ft./12/in.} \times 1500' \times 300'/\text{pit} \times 7.48 \text{ gal/ft}^3 \times 1\text{yr}/365\text{days} \times 1\text{day}/24\text{hr.} \times 1\text{hr.}/60 \text{ min.} \times 15 \text{ in. runoff}/100 \text{ in. precipitation} = \\ = 9.9 \text{ gal./min. average discharge from spoil runoff into the pit area.} \end{aligned}$$

The total average flow to the pit is represented by the sum of the direct pit precipitation and the water flowing to the pit from the spoil area as follows:

$$\text{Total Average Flow} = \text{Direct Pit Precipitation} + \text{Spoil Runoff}$$

$$\text{Total Average Flow} = 21.0 \text{ gal./min} + 9.9 \text{ gal./min.} = 30.9 \text{ gal./min.}$$

The resulting average waste load from a permitted treatment pond area is as follows.

Allowable Iron Waste Load Allocation:
30.9 gal./min. x 3 mg/l x 0.01202 = 1.1 lbs./day

Allowable Manganese Waste Load Allocation:
30.9 gal./min. x 2 mg/l x 0.01202 = 0.7 lbs./day

Allowable Aluminum Waste Load Allocation:
30.9 gal./min. x 0.75 mg/l x 0.01202 = 0.3 lbs./day

(Note: 0.01202 is a conversion factor to convert from a flow rate in gal/min. and a concentration in mg/l to a load in units of lbs./day.)

There is little or no documentation available to quantify the actual amount of water that is typically pumped from active pits to treatment ponds. Experience and observations suggest that the above approach is very conservative and overestimates the quantity of water, creating a large margin of safety in the methodology. County specific precipitation rates can be used in place of the long-term state average rate, although the margin of safety is greater than differences from individual counties. It is common for many mining sites to have very “dry” pits that rarely accumulate water that would require pumping and treatment.

Also, it is the goal of DEP’s permit review process to not issue mining permits that would cause negative impacts to the environment. As a step to insure that a mine site does not produce acid mine drainage, it is common to require the addition of alkaline materials (waste lime, baghouse lime, limestone, etc.) to the backfill spoil materials to neutralize any acid-forming materials that may be present. This practice of ‘alkaline addition’ or the incorporation of naturally occurring alkaline spoil materials (limestone, alkaline shale or other rocks) may produce alkaline pit water with very low metals concentrations that does not require treatment. A comprehensive study in 1999 evaluated mining permits issued since 1987 and found that only 2.2 percent resulted in a post-mining pollution discharge (Evaluation of Mining Permits Resulting in Acid Mine Drainage 1987-1996: A Post Mortem Study, March 1999). As a result of efforts to insure that acid mine drainage is prevented, most mining operations have alkaline pit water that often meets effluent limits and requires little or no treatment.

While most mining operations are permitted and allowed to have a standard, 1500’ x 300’ pit, most are well below that size and have a corresponding decreased flow and load. Where pit dimensions are greater than the standard size or multiple pits are present, the calculations to define the potential pollution load can be adjusted accordingly. Hence, the above calculated

Waste Load Allocation is very generous and likely high compared to actual conditions that are generally encountered. A large margin of safety is included in the WLA calculations.

The allowable load for the stream segment is determined by modeling of flow and water quality data. The allowable load has a potential Waste Load Allocation (WLA) component if there is active mining or anticipated future mining and a Load Allocation (LA). So, the sum of the Load Allocation and the Waste Load Allocation is equal to the allowed load. The WLA is determined by the above calculations and the LA is determined by the difference between the allowed load and the WLA.

$$\text{Allowed Load} = \text{Waste Load Allocation} + \text{Load Allocation}$$

Or

$$\text{Load Allocation} = \text{Allowed Load} - \text{Waste Load Allocation}$$

This is an explanation of the quantification of the potential pollution load reporting to the stream from permitted pit water treatment ponds that discharge water at established effluent limits. This allows for including active mining activities and their associated Waste Load in the TMDL calculations to more accurately represent the watershed pollution sources and the reductions necessary to achieve in-stream limits. When a mining operation is concluded its WLA is available for a different operation. Where there are indications that future mining in a watershed may be greater than the current level of mining activity, an additional WLA amount may be included in the allowed load to allow for future mining.

Attachment D

TMDLs By Segment

York Run

The TMDL for York Run consists of load allocations to six sampling sites on York Run (YORK10, YORK09, YORK08, YORK06, YORK05 and YORK01) and three sites on unnamed tributaries of York Run (YORK07, YORK04 and YORK02). Sample data sets were collected in 2003 and 2004. All sample points are shown on the maps included in Attachment A as well as on the loading schematic presented on the following page.


York Run is listed on the 1996 PA Section 303(d) list for metals from AMD as being the cause of the degradation to this stream. Although this TMDL will focus primarily on metal loading to the York Run Watershed, acid loading analysis will be performed. The objective is to reduce acid loading to the stream, which will in turn raise the pH to the desired range (between 6 & 9) 99% of the time. The result of this analysis is an acid loading reduction that equates to meeting standards for pH (see TMDL Endpoint section in the report, Table 2). The method and rationale for addressing pH is contained in Attachment B.

An allowable long-term average in-stream concentration was determined at each sample point for metals and acidity. The analysis is designed to produce an average value that, when met, will be protective of the water-quality criterion for that parameter 99% of the time. An analysis was performed using Monte Carlo simulation to determine the necessary long-term average concentration needed to attain water-quality criteria 99% of the time. The simulation was run assuming the data set was log normally distributed. Using the mean and standard deviation of the data set, 5000 iterations of sampling were completed, and compared against the water-quality criterion for that parameter. For each sampling event a percent reduction was calculated, if necessary, to meet water-quality criteria. A second simulation that multiplied the percent reduction times the sampled value was run to insure that criteria were met 99% of the time. The mean value from this data set represents the long-term average concentration that needs to be met to achieve water-quality standards. Following is an explanation of the TMDL for each allocation point.

York Run Sampling Station Diagram

Arrows represent direction of flow

Diagram not to scale

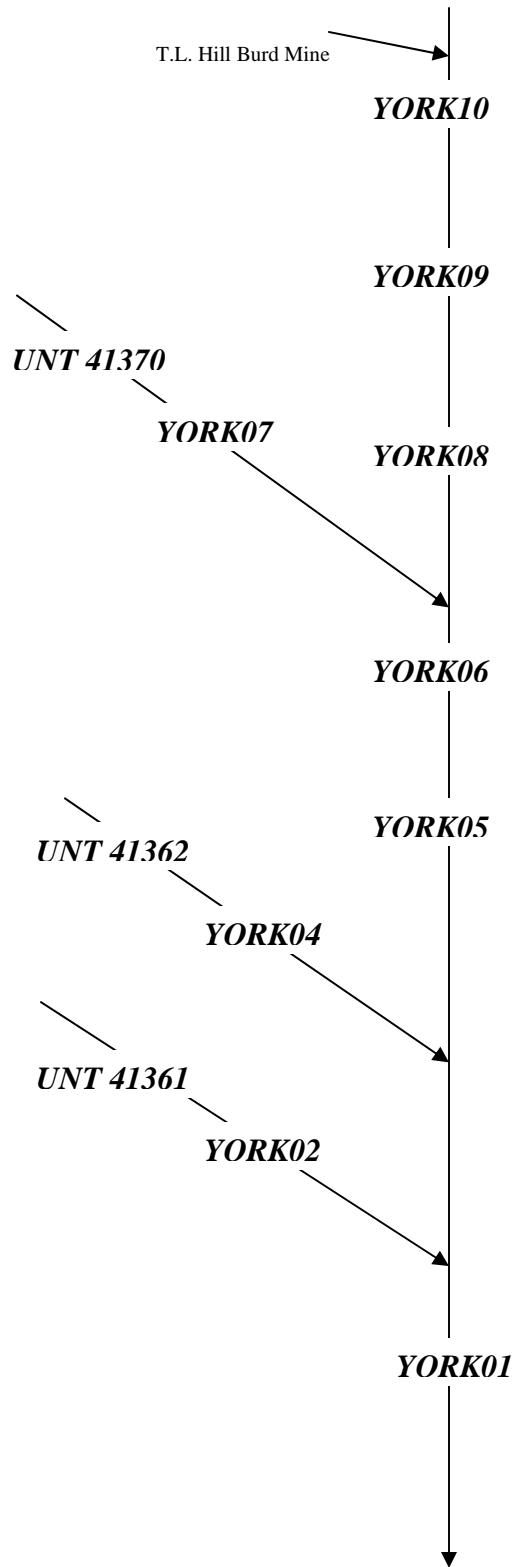

Waste Load Allocation –T.L. Hill Coal Company, Burd Mine

The T.L. Hill Coal Company (SMP26970106; NPDES PA0202061) Burd Operation has seven mine drainage treatment facilities requiring treatment. Outfalls 006, 007, 008, 009, 010, 011, and 012 are discharges from treatment facilities. These discharges do not have effluent limits for aluminum currently; a concentration of 0.75 mg/L was assigned to the discharge for aluminum in the effluent. The following table shows the waste load allocation for this discharge.

Table D1. Waste Load Allocations at Burd Operation			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
006			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
007			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
008			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
009			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
010			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
011			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75
012			
Al	0.75	0.045	0.28
Fe	3.0	0.045	1.13
Mn	2.0	0.045	0.75

TMDL calculations- YORK10- Headwaters of York Run near town of York Run

The TMDL for sample point YORK10 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for the headwaters of York Run was computed using water-quality sample data collected at point YORK10. The average flow, measured at the sampling point YORK10 (10.37 MGD), is used for these computations. The

allowable load allocations calculated at YORK10 will directly affect the downstream point YORK09.

Sample data at point YORK10 shows that the York Run headwaters segment has a pH ranging between 5.9 and 6.4. There currently is not an entry for this segment on the Pa Section 303(d) list for impairment due to pH.

A TMDL for aluminum, iron and manganese has been calculated at this site. There was no acidity in present in the water collected during water quality sampling at YORK10. Because water quality standards are met, a TMDL for this parameter isn't necessary and is not calculated.

Table D2 shows the measured and allowable concentrations and loads at YORK10. Table D3 shows the percent reductions for aluminum, iron and manganese.

Table D2	Flow (gpm)=	Measured		Allowable	
		Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.76	152.56	0.29	24.67
	Iron	37.67	3258.1	1.10	95.59
ND = not determined	Manganese	3.09	266.91	0.87	75.64
NA = not applicable	Acidity	0	0	NA	NA
	Alkalinity	99.97	8649.12		

Table D3. Allocations YORK10			
YORK10	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)
Existing Load @ YORK10	152.56	3258.81	266.91
Allowable Load @ YORK10	24.67	95.59	75.64
Load Reduction @ YORK10	127.89	3163.22	191.27
% Reduction required @ YORK10	84%	97%	72%

TMDL calculations- YORK09- York Run near Sleepy Hollow Rd.

The TMDL for sampling point YORK09 consists of a load allocation to all of the area between YORK10 and YORK09 shown in Attachment A. The load allocation for this segment of York Run was computed using water-quality sample data collected at point YORK09. The average flow, measured at the sampling point YORK09 (11.06 MGD), is used for these computations.

Sample data at point YORK09 shows pH ranging between 6.0 and 6.3; pH will be addressed as part of this TMDL. There currently is not an entry for this segment on the Section Pa 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, and manganese at YORK09 has been calculated. There was no acidity in present in the water collected during water quality sampling at YORK09. Because water quality standards are met, a TMDL for this parameter isn't necessary and is not calculated.

Table D4 shows the measured and allowable concentrations and loads at YORK09. Table D5 shows the percent reduction for aluminum, iron, and manganese needed at YORK09.

Table D4		Measured		Allowable	
Flow (gpm)=	7682.50	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	2.18	200.83	0.34	31.73
	Iron	33.33	3075.46	1.10	101.33
	Manganese	3.14	289.40	0.83	76.20
NA = not applicable	Acidity	0	0	NA	NA
	Alkalinity	80.92	7465.5		

The measured and allowable loading for point YORK09 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points YORK10 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points YORK10 and YORK09 to determine a total load tracked for the segment of stream between YORK09 and YORK10. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at YORK09.

Table D5. Allocations YORK09			
	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)
YORK09			
Existing Load @ YORK09	200.83	3075.46	289.40
Difference in measured Loads between the loads that enter and existing YORK09	48.27	-183.35	22.50
Percent loss due calculated at YORK09	0%	5.6%	0%
Additional load tracked from above samples	24.67	95.59	75.64
Percentage of upstream loads that reach the YORK09	100%	94.4%	100%
Total load tracked between YORK10 and YORK09	72.94	90.24	98.14
Allowable Load @ YORK09	31.73	101.33	76.20
Load Reduction @ YORK09	41.21	0	21.94
% Reduction required @ YORK09	57%	0%	23%

A waste load allocation for future mining was included for this segment of York Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment.

Table D6. Waste Load Allocations for future mining operations

Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
Future Operation 1			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 2			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 3			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50

TMDL calculations- YORK08- York Run near York Run Junction

The TMDL for sampling point YORK08 consists of a load allocation to all of the area between YORK09 and YORK08 shown in Attachment A. The load allocation for this segment of York Run was computed using water-quality sample data collected at point YORK08. The average flow, measured at the sampling point YORK08 (12.61 MGD), is used for these computations.

Sample data at point YORK08 shows pH ranging between 6.1 and 6.4; pH will be addressed as part of this TMDL. There currently is not an entry for this segment on the Section Pa 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, and manganese at YORK08 has been calculated. There was no acidity in present in the water collected during water quality sampling at YORK08. Because water quality standards are met, a TMDL for this parameter isn't necessary and is not calculated.

Table D7 shows the measured and allowable concentrations and loads at YORK08. Table D8 shows the percent reduction for aluminum, iron, and manganese needed at YORK08.

Table D7		Measured		Allowable	
Flow (gpm)=	8757.83	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	3.70	389.51	0.26	27.06
	Iron	27.50	2892.40	0.98	102.89
	Manganese	2.96	311.50	0.79	82.85
NA = not applicable	Acidity	0	0	NA	NA
	Alkalinity	54.98	5782.16		

The measured and allowable loading for point YORK08 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on

the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points YORK09 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points YORK09 and YORK08 to determine a total load tracked for the segment of stream between YORK08 and YORK09. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at YORK08.

Table D8. Allocations YORK08			
	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)
YORK08			
Existing Load @ YORK08	389.51	2892.40	311.50
Difference in measured Loads between the loads that enter and existing YORK08	188.68	-183.06	22.10
Percent loss due calculated at YORK08	0%	6.0%	0%
Additional load tracked from above samples	31.73	101.33	76.20
Percentage of upstream loads that reach the YORK08	100%	94.0%	100%
Total load tracked between YORK09 and YORK08	220.41	95.25	98.30
Allowable Load @ YORK08	27.06	102.89	82.85
Load Reduction @ YORK08	193.35	0	15.45
% Reduction required @ YORK08	88%	0%	16%

A waste load allocation for future mining was included for this segment of York Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment.

Table D9. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
Future Operation 1			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 2			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 3			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50

TMDL calculations- YORK07- mouth of Unnamed Tributary 41370 to York Run

The TMDL for sample point YORK07 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this tributary of York Run was computed using water-quality sample data collected at point YORK07. The average flow, measured at the sampling point YORK07 (2.74 MGD), is used for these computations. The

allowable load allocations calculated at YORK07 will directly affect the downstream point YORK06.

Sample data at point YORK07 shows that this unnamed tributary 41370 of York Run segment has a pH ranging between 2.8 and 3.2. There currently is not an entry for this segment on the Pa Section 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D10 shows the measured and allowable concentrations and loads at YORK07. Table D11 shows the percent reductions for aluminum, iron, manganese and acidity.

Table D10		Measured		Allowable	
Flow (gpm)=	1905.33	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	35.73	817.66	0.34	7.79
	Iron	16.32	373.36	0.60	13.71
	Manganese	3.20	73.19	0.57	13.15
	Acidity	306.67	7017.24	0	0
	Alkalinity	0	0		

Table D11. Allocations YORK07				
YORK07	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ YORK07	817.66	373.36	73.19	7017.24
Allowable Load @ YORK07	7.79	13.71	13.15	0.00
Load Reduction @ YORK07	809.87	359.65	60.04	7017.24
% Reduction required @ YORK07	99%	97%	83%	100%

TMDL calculations- YORK06- York Run at Church Street

The TMDL for sampling point YORK06 consists of a load allocation to all of the area between YORK07 and YORK06 shown in Attachment A. The load allocation for this segment of York Run was computed using water-quality sample data collected at point YORK06. The average flow, measured at the sampling point YORK06 (16.99 MGD), is used for these computations.

Sample data at point YORK06 shows pH ranging between 4.7 and 6.2; pH will be addressed as part of this TMDL. There currently is not an entry for this segment on the Section Pa 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, manganese and acidity at YORK06 has been calculated.

Table D12 shows the measured and allowable concentrations and loads at YORK06. Table D13 shows the percent reduction for aluminum, iron, manganese and acidity needed at YORK06.

Table D12	Flow (gpm)=	Measured		Allowable	
		Concentration mg/L	Load lbs/day	Concentration mg/L	Load lbs/day
	Aluminum	7.90	1119.28	0.39	55.53
	Iron	24.00	3399.63	1.12	158.92
	Manganese	2.88	408.19	0.67	94.75
	Acidity	37.66	5335.06	4.74	671.06
	Alkalinity	13.41	1899.07		

The measured and allowable loading for point YORK06 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points YORK08/YORK07 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points YORK08/YORK07 and YORK06 to determine a total load tracked for the segment of stream between YORK06 and YORK08/YORK07. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at YORK06.

Table D13. Allocations YORK06				
YORK06	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ YORK06	1119.28	3399.63	408.19	5335.06
Difference in measured Loads between the loads that enter and existing YORK06	-87.89	133.87	23.50	-1682.18
Percent loss due calculated at YORK06	7.3%	0%	0%	24.0%
Additional load tracked from above samples	34.85	116.60	96.00	0
Percentage of upstream loads that reach the YORK06	92.7%	100%	100%	76.0%
Total load tracked between YORK08/YORK07 and YORK06	32.31	250.47	119.50	0
Allowable Load @ YORK06	55.53	158.92	94.75	671.06
Load Reduction @ YORK06	0	91.55	24.75	0
% Reduction required @ YORK06	0%	37%	21%	0%

A waste load allocation for future mining was included for this segment of York Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment.

Table D14. Waste Load Allocations for future mining operations

Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
Future Operation 1			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 2			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 3			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50

TMDL calculations- YORK05- York Run at Smithfield Rd

The TMDL for sampling point YORK05 consists of a load allocation to all of the area between YORK06 and YORK05 shown in Attachment A. The load allocation for this segment of York Run was computed using water-quality sample data collected at point YORK05. The average flow, measured at the sampling point YORK05 (20.60 MGD), is used for these computations.

Sample data at point YORK05 shows pH ranging between 4.5 and 6.1; pH will be addressed as part of this TMDL. There currently is not an entry for this segment on the Section Pa 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, manganese and acidity at YORK05 has been calculated.

Table D15 shows the measured and allowable concentrations and loads at YORK05. Table D16 shows the percent reduction for aluminum, iron, manganese and acidity needed at YORK05.

Table D15		Measured		Allowable	
		Concentration	Load	Concentration	Load
Flow (gpm)=	14303.33	mg/L	lbs/day	mg/L	lbs/day
	Aluminum	7.90	1356.18	0.44	74.91
	Iron	20.00	3435.55	1.07	183.52
	Manganese	2.64	453.21	0.62	105.65
	Acidity	40.62	6978.17	2.42	415.49
	Alkalinity	5.90	1014.06		

The measured and allowable loading for point YORK05 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points YORK06 shows the total load that was permitted from

upstream sources. This value was added to the difference in existing loads between points YORK06 and YORK05 to determine a total load tracked for the segment of stream between YORK05 and YORK06. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at YORK05.

Table D16. Allocations YORK05				
	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
YORK05				
Existing Load @ YORK05	1356.18	3435.55	453.21	6978.17
Difference in measured Loads between the loads that enter and existing YORK05	236.90	35.92	45.02	1643.11
Additional load tracked from above samples	55.53	158.92	94.75	671.06
Total load tracked between YORK06 and YORK05	292.43	194.84	139.77	2314.17
Allowable Load @ YORK05	74.91	183.52	105.65	415.49
Load Reduction @ YORK05	217.52	11.32	34.12	1898.68
% Reduction required at YORK05	75%	6%	25%	82%

A waste load allocation for future mining was included for this segment of York Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment.

Table D17. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
Future Operation 1			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 2			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 3			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50

TMDL calculations- YORK04- Unnamed Tributary 41362 to York Run

The TMDL for sample point YORK04 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this tributary of York Run was computed using water-quality sample data collected at point YORK04. The average flow, measured at the sampling point YORK04 (0.88 MGD), is used for these computations. The allowable load allocations calculated at YORK04 will directly affect the downstream point YORK01.

Sample data at point YORK04 shows that this unnamed tributary 41362 of York Run segment has a pH ranging between 4.6 and 7.1. There currently is not an entry for this segment on the Pa Section 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D18 shows the measured and allowable concentrations and loads at YORK04. Table D19 shows the percent reductions for aluminum, iron, manganese and acidity.

Table D18		Measured		Allowable	
Flow (gpm)=	607.50	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	7.71	56.21	0.23	1.65
	Iron	0.79	5.73	0.52	3.80
	Manganese	1.01	7.36	0.48	3.49
	Acidity	15.34	111.91	2.05	14.93
	Alkalinity	12.50	91.22		

Table D19. Allocations YORK04				
YORK04	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ YORK04	56.21	5.73	7.36	111.91
Allowable Load @ YORK04	1.65	3.80	3.49	14.93
Load Reduction @ YORK04	54.56	1.93	3.87	96.98
% Reduction required @ YORK04	97%	34%	53%	87%

TMDL calculations- YORK02- Unnamed Tributary 41361 to York Run

The TMDL for sample point YORK02 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this tributary of York Run was computed using water-quality sample data collected at point YORK02. The average flow, measured at the sampling point YORK02 (0.20 MGD), is used for these computations. The allowable load allocations calculated at YORK02 will directly affect the downstream point YORK01.

Sample data at point YORK02 shows that this unnamed tributary 41361 of York Run segment has a pH ranging between 7.6 and 7.8. There currently is not an entry for this segment on the Pa Section 303(d) list for impairment due to pH.

All aluminum, iron and manganese samples were found to be below water quality standards. There was no acidity in present in the water collected during water quality sampling at YORK02. Because water quality standards are met, a TMDL for these parameters isn't necessary and is not calculated.

Table D20 shows the measured and allowable concentrations and loads at YORK02.

Table D20		Measured		Allowable	
Flow (gpm)=	136.67	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	0.08	0.13	0.08	0.13
	Iron	0.27	0.44	0.27	0.44
	Manganese	0.05	0.08	0.05	0.08
NA = not applicable	Acidity	0	0	ND	NA
	Alkalinity	64.60	106.0		

TMDL calculations- YORK01- mouth segment of York Run

The TMDL for sampling point YORK01 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this segment of York Run was computed using water-quality sample data collected at point YORK01. The average flow, measured at the sampling point YORK01 (23.06 MGD), is used for these computations.

Sample data at point YORK01 shows pH ranging between 4.7 and 6.2; pH will be addressed as part of this TMDL. There currently is not an entry for this segment on the Section Pa 303(d) list for impairment due to pH.

A TMDL for aluminum, iron, manganese and acidity at YORK01 has been calculated.

Table D21 shows the measured and allowable concentrations and loads at YORK01. Table D22 shows the percent reduction for aluminum, iron, manganese and acidity needed at YORK01.

Table D21		Measured		Allowable	
Flow (gpm)=	16012.33	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	7.86	1511.81	0.46	87.93
	Iron	20.17	3878.08	0.89	171.90
	Manganese	2.53	486.20	0.65	125.76
	Acidity	35.73	6871.26	2.31	444.25
	Alkalinity	5.43	1044.20		

The measured and allowable loading for point YORK01 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points YORK05/YORK04/YORK02 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points YORK05/YORK04/YORK02 and YORK01 to determine a total load tracked for the segment of stream between YORK01 and YORK05/YORK04/YORK02. This load will be

compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at YORK01.

Table D22. Allocations YORK01

YORK01	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ YORK01	1511.81	3878.08	486.20	6871.26
Difference in measured Loads between the loads that enter and existing YORK01	99.29	436.36	25.55	-218.82
Percent loss due calculated at YORK01	0%	0%	0%	3.1%
Additional load tracked from above samples	76.69	187.76	109.22	430.42
Percentage of upstream loads that reach the YORK01	100%	100%	100%	96.9%
Total load tracked between YORK05/YORK04/YORK02 and YORK01	175.98	624.12	134.77	417.14
Allowable Load @ YORK01	87.93	171.90	125.76	444.25
Load Reduction @ YORK01	88.05	452.22	9.01	0
% Reduction required @ YORK01	50%	72%	7%	0%

A waste load allocation for future mining was included for this segment of York Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment.

Table D23. Waste Load Allocations for future mining operations

Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow (MGD)	Allowable Load (lbs/day)
Future Operation 1			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 2			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50
Future Operation 3			
Al	0.75	0.090	0.56
Fe	3.0	0.090	2.26
Mn	2.0	0.090	1.50

Margin of Safety

For this study the margin of safety is applied implicitly. A MOS is implicit because the allowable concentrations and loadings were simulated using Monte Carlo techniques and employing the @Risk software. Other margins of safety used for this TMDL analysis include the following:

- Effluent variability plays a major role in determining the average value that will meet water-quality criteria over the long-term. The value that provides this variability in our analysis is the standard deviation of the dataset. The simulation results are based on this variability and

the existing stream conditions (an uncontrolled system). The general assumption can be made that a controlled system (one that is controlling and stabilizing the pollution load) would be less variable than an uncontrolled system. This implicitly builds in a margin of safety.

- An additional MOS is provided because that the calculations were done with a daily Fe average instead of the 30-day average.

Seasonal Variation

Seasonal variation is implicitly accounted for in these TMDLs because the data used represents all seasons.

Critical Conditions

The reductions specified in this TMDL apply at all flow conditions. A critical flow condition could not be identified from the data used for this analysis.

Attachment E

**Excerpts Justifying Changes Between the 1996, 1998, and 2002
Section 303(d) Lists and Integrated Report/List (2004, 2006)**

The following are excerpts from the Pennsylvania DEP Section 303(d) narratives that justify changes in listings between the 1996, 1998, 2002, 2004 and 2006 303(d) Lists and Integrated Report>List (2006). The Section 303(d) listing process has undergone an evolution in Pennsylvania since the development of the 1996 list.

In the 1996 Section 303(d) narrative, strategies were outlined for changes to the listing process. Suggestions included, but were not limited to, a migration to a Global Information System (GIS), improved monitoring and assessment, and greater public input.

The migration to a GIS was implemented prior to the development of the 1998 Section 303(d) list. As a result of additional sampling and the migration to the GIS some of the information appearing on the 1996 list differed from the 1998 list. Most common changes included:

1. mileage differences due to recalculation of segment length by the GIS;
2. slight changes in source(s)/cause(s) due to new EPA codes;
3. changes to source(s)/cause(s), and/or miles due to revised assessments;
4. corrections of misnamed streams or streams placed in inappropriate SWP subbasins; and
5. unnamed tributaries no longer identified as such and placed under the named watershed listing.

Prior to 1998, segment lengths were computed using a map wheel and calculator. The segment lengths listed on the 1998 Section 303(d) list were calculated automatically by the GIS (ArcInfo) using a constant projection and map units (meters) for each watershed. Segment lengths originally calculated by using a map wheel and those calculated by the GIS did not always match closely. This was the case even when physical identifiers (e.g., tributary confluence and road crossings) matching the original segment descriptions were used to define segments on digital quad maps. This occurred to some extent with all segments, but was most noticeable in segments with the greatest potential for human errors using a map wheel for calculating the original segment lengths (e.g., long stream segments or entire basins).

Migration to National Hydrography Data (NHD)

New to the 2006 report is use of the 1/24,000 National Hydrography Data (NHD) streams GIS layer. Up until 2006 the Department relied upon its own internally developed stream layer. Subsequently, the United States Geologic Survey (USGS) developed 1/24,000 NHD streams layer for the Commonwealth based upon national geodatabase standards. In 2005, DEP contracted with USGS to add missing streams and correct any errors in the NHD. A GIS contractor transferred the old DEP stream assessment information to the improved NHD and the old DEP streams layer was archived. Overall, this marked an improvement in the quality of the streams layer and made the stream assessment data compatible with national standards but it necessitated a change in the Integrated Listing format. The NHD is not attributed with the old DEP five digit stream codes so segments can no longer be listed by stream code but rather only by stream name or a fixed combination of NHD fields known as reachcode and ComID. The NHD is aggregated by Hydrologic Unit Code (HUC) watersheds so HUCs rather than the old State Water Plan (SWP) watersheds are now used to group streams together. The map in

Appendix E illustrates the relationship between the old SWP and new HUC watershed delineations. A more basic change was the shift in data management philosophy from one of “dynamic segmentation” to “fixed segments”. The dynamic segmentation records were proving too difficult to manage from an historical tracking perspective. The fixed segment methods will remedy that problem. The stream assessment data management has gone through many changes over the years as system requirements and software changed. It is hoped that with the shift to the NHD and OIT’s (Office of Information Technology) fulltime staff to manage and maintain SLIMS the systems and formats will now remain stable over many Integrated Listing cycles.

Attachment F

Water Quality Data Used In TMDL Calculations

Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK10	4/4/2003	5608	6.0	0	101.4	1.7	35	3.3
	5/28/2003	6205	6.4	0	97.1	3.06	33	2.9
Latitude:	8/21/2003	3029	6.1	0.0	121	1.1	46	3.3
N39 49' 59"	3/11/2004	10193	6.0	0.0	90.7	2.41	35	3.07
Longitude:	4/22/2004	10899	6.0	0.0	86.6	1.61	35	3.04
W79 47' 04"	5/18/2004	7290	5.9	0.0	103.0	0.7	42	2.9
	Average	7204.00000	6.03667	0.00000	99.97000	1.76333	37.66667	3.08500
	St Dev	2951.961517	0.16269	0.00000	12.04889	0.85997	5.12510	0.18064
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK09	4/4/2003	6008	6.0	0	68.7	2.7	31	3.5
	5/28/2003	6295	6.2	0	73.8	3.2	28	3
Latitude:	8/21/2003	3266	6.3	0.0	96.2	1.6	40	3.4
N39 49' 34"	3/11/2004	10656	6.2	0.0	79.0	2.66	31	3.03
Longitude:	4/22/2004	12549	6.0	0.0	75.5	1.9	32	3.09
W79 47' 15"	5/18/2004	7321	6.2	0.0	92.3	1	38	2.8
	Average	7682.50000	6.14000	0.00000	80.91500	2.17667	33.33333	3.13667
	St Dev	3373.122752	0.09529	0.00000	10.90413	0.81833	4.63321	0.26341
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK08	4/4/2003	6523	6.3	0	48.2	7.6	19	2.8
	5/28/2003	7584	6.3	0	48.6	4.2	24	2.8
Latitude:	8/21/2003	3919	6.4	0.0	63.9	2.6	34	3.5
N39 48' 57"	3/11/2004	10801	6.2	0.0	58.4	3.04	28	3
Longitude:	4/22/2004	14414	6.1	0.0	53.7	2.98	29	3.07
W79 48' 18"	5/18/2004	9306	6.3	0.0	57.1	1.8	31	2.6
	Average	8757.83333	6.24000	0.00000	54.97500	3.70333	27.50000	2.96167
	St Dev	3640.162382	0.09757	0.00000	6.06421	2.06077	5.31977	0.31180
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK07	4/4/2003	1271	3.0	399	0	48	24	3.7
	5/28/2003	1990	3.0	387	0	45	24	3.4
Latitude:	8/21/2003	322	2.8	396.0	0	46	15	4.4
N39 48' 58"	3/11/2004	2469	3.0	233.0	0.0	26	14	2.58
Longitude:	4/22/2004	3243	3.0	306.0	0.0	36	17	3.01
W79 48' 18"	5/18/2004	2137	3.2	119.0	0.0	13.4	3.9	2.1
	Average	1905.33333	3.01333	306.66667	0.00000	35.73333	16.31667	3.19833
	St Dev	1007.693737	0.13692	112.78771	0.00000	13.67723	7.48075	0.81982
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK06	4/4/2003	9355	5.1	49.5	5.2	9.8	25	3.4
	5/28/2003	11700	4.7	63.7	2.9	11	20	2.7
Latitude:	8/21/2003	4286	6.2	17.0	30	6.4	29	3.5
N39 48' 36"	3/11/2004	14710	5.7	33.4	15.1	7.39	22	2.62
Longitude:	4/22/2004	16159	5.1	49.7	6.3	8.52	25	2.97
W79 49' 14"	5/18/2004	14559	5.9	12.6	21.0	4.3	23	2.1

	Average	11794.83333	5.46500	37.66333	13.40667	7.90167	24.00000	2.88167
	St Dev	4416.539886	0.56515	20.17924	10.62594	2.41141	3.09839	0.52370
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK05	4/4/2003	9851	5.2	47.4	4.5	8.6	21	3
	5/28/2003	15530	4.5	62.5	0	11	17	2.3
Latitude:	8/21/2003	4356	6.1	14.7	19.1	6	25	3.5
N39 48' 01"	3/11/2004	16071	4.6	43.9	1.0	8.06	19	2.49
Longitude:	4/22/2004	18804	5.1	51.5	4.0	8.21	21	2.74
W79 49' 48"	5/18/2004	21208	5.3	23.7	6.9	5.5	17	1.8
	Average	14303.33333	5.14333	40.62333	5.90333	7.89500	20.00000	2.63833
	St Dev	6185.9921	0.59362	17.96243	6.93079	1.97947	3.03315	0.58701
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK04	4/4/2003	351	5.2	18.1	4.2	7.6	0.71	1
	5/28/2003	837	6.3	0.22	9.4	8	1	0.91
Latitude:	8/21/2003	40	7.1	0.0	46.3	0.28	0.22	0.46
N39 48' 01"	3/11/2004	895	4.7	21.1	1.1	9.01	0.67	1.01
Longitude:	4/22/2004	762	4.6	50.8	1.1	15.64	0.61	1.57
W79 50' 35"	5/18/2004	760	6.5	1.8	13.0	5.7	1.5	1.1
	Average	607.50000	5.71500	15.33833	12.50333	7.70500	0.78500	1.00833
	St Dev	337.7281451	1.04382	19.73192	17.21481	4.97827	0.43038	0.35617
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK02	4/4/2003	132	7.6	0.0	54.6	0.03	0.26	0.07
	5/28/2003	272	7.8	0.0	63.1	0.15	0.39	0.05
Latitude:	8/21/2003	6	7.7	0.0	76.1	0.05	0.16	0.03
N39 47' 21"								
Longitude:								
W79 50' 42"								
	Average	136.66667	7.72333	0.00000	64.60000	0.07667	0.27000	0.05000
	St Dev	133.0613893	0.10504	0.00000	10.82820	0.06429	0.11533	0.02000
Site	Date	Flow (gpm)	pH	Acidity (mg/L)	Alk (mg/L)	Al (mg/L)	Fe (mg/L)	Mn (mg/L)
YORK01	4/4/2003	9994	5.2	43.5	3.3	7.6	19	2.8
	5/28/2003	15199	4.7	53.1	2.1	10	16	2.3
Latitude:	8/21/2003	3749	6.2	13.0	13.5	5.2	20	3.2
N39 47' 11"	3/11/2004	20566	5.5	29.0	5.0	6.54	16	2.16
Longitude:	4/22/2004	19063	5.0	47.7	2.7	8.63	21	2.81
W79 50' 52"	5/18/2004	27503	5.4	28.2	6.0	9.2	29	1.9
	Average	16012.33333	5.33833	35.73167	5.43000	7.86167	20.16667	2.52833
	St Dev	8358.816415	0.52909	15.00139	4.21155	1.78066	4.79236	0.48721

Attachment G

TMDLs and NPDES Permitting Coordination

NPDES permitting is unavoidably linked to TMDLs through waste load allocations and their translation, through the permitting program, to effluent limits. Primary responsibility for NPDES permitting rests with the District Mining Offices (for mining NPDES permits) and the Regional Offices (for industrial NPDES permits). Therefore, the DMOs and Regions will maintain tracking mechanisms of available waste load allocations, etc. in their respective offices. The TMDL program will assist in this effort. However, the primary role of the TMDL program is TMDL development and revision/amendment (the necessity for which is as defined in the Future Modifications section) at the request of the respective office. All efforts will be made to coordinate public notice periods for TMDL revisions and permit renewals/reissuances.

Load Tracking Mechanisms

The Department has developed tracking mechanisms that will allow for accounting of pollution loads in TMDL watersheds. This will allow permit writers to have information on how allocations have been distributed throughout the watershed in the watershed of interest while making permitting decisions. These tracking mechanisms will allow the Department to make minor changes in WLAs without the need for EPA to review and approve a revised TMDL. Tracking will also allow for the evaluation of loads at downstream points throughout a watershed to ensure no downstream impairments will result from the addition, modification or movement of a permit.

Options for Permittees in TMDL Watersheds

The Department is working to develop options for mining permits in watersheds with approved TMDLs.

Options identified

- Build excess WLA into the TMDL for anticipated future mining. This could then be used for a new permit. Permittee must show that there has been actual load reduction in the amount of the proposed permit or must include a schedule to guarantee the reductions using current data referenced to the TMDL prior to permit issuance.
- Use WLA that is freed up from another permit in the watershed when that site is reclaimed. If no permits have been recently reclaimed, it may be necessary to delay permit issuance until additional WLA becomes available.
- Re-allocate the WLA(s) of existing permits. WLAs could be reallocated based on actual flows (as opposed to design flows) or smaller than approved pit/spoil areas (as opposed to default areas). The "freed-up" WLA could be applied to the new permit. This option would require the simultaneous amendment of the permits involved in the reallocation.
- Non-discharge alternative.

Other possible options

The following two options have also been identified for use in TMDL watersheds. However, before recommendation for use as viable implementation options, a thorough regulatory (both state and federal) review must be completed. These options should not be implemented until the completion of the regulatory review and development of any applicable administrative mechanisms.

- Issue the permit with in-stream water quality criteria values as the effluent limits. The in-stream criteria value would represent the monthly average, with the other limits adjusted accordingly (e.g., for Fe, the limits would be 1.5 mg/L monthly average, 3.0 mg/L daily average and 4.0 instantaneous max mg/L).
- The applicant would agree to treat an existing source (point or non-point) where there is no responsible party and receive a WLA based on a portion of the load reduction to be achieved. The result of using these types of offsets in permitting is a net improvement in long-term water quality through the reclamation or treatment of an abandoned source.

Attachment H

Comment and Response

No public comments were received for the York Run TMDL.